

The Aro-lite Curve features a unique curve design that allows for added access to the deck area when utilizing the optional cone holders. Curb mounted control and battery boxes keep the operator away from traffic. In addition, our manufactured sliding jacks have a limited number of holes to reduce bending.

Add our optional wireless control and the Curve can be controlled from the safety of your vehicle.



Batteries and Solar Collectors

Batteries	(1) 12v sealed AGM, for other options: Call factory
Battery enclosure	Lockable, ventilated, acid resistant
Solar collector	Crystalline silicon
Solar collector frame	Formed steel, powder coated black self erecting

Features

- Environmentally friendly sealed battery prevent spills and leaks
- Control with touch sensitive keys and LED display uses 50% less energy which means longer run times between charges
- Replaceable fenders means less repair time
- Curb side winch and battery box means greater safety for the user
- Reduced holes in slide jacks to reduce bending
- Optional cone holder

2440 Artesia Avenue
 Fullerton, CA 92833
 United States of America

Sequential chevron right

Single flashing arrow

Double flashing arrow mode Caution rectangular

Alternating diamond caution mode

right or left mode

mode Caution bar mode

or left mode Seq. stem arrow right or

left mode Single head arrow right or left mode

- info@nationalsignalinc.ne
- www.nationalsignalinc.r
- **(k**) 1-888-994-0300



Access our website by scanning our QR Code

Trailer Construction

Deck area	43" deep x 50" wide
Drawbar	3" x 3" x 3/8" wall steel tube, removable
Fenders	formed steel bolt-on
Frame	(4) post design 2.125" x 1.78" x 1/8" steel tubing formed to an arc MIG welded to frame
Length w/ drawbar	114″
Length w/o drawbar	67″
Height sign up	140″
Height sign down	90″
Hitch	2" ball class II 3500 lb capacity, removable
Jacks	(4) slide type plated, (1) swing type
Tire size	ST205/75-D15 load C
Weight	1000 lbs
Winch	1000 lb. with double disc brake system, 1/4" diameter galvanized steel cable mounted on curb side


Display

Front lamps	15 or 25 PAR 46
Height	48″
Lamp covers	360°
Lamp type	LED, 590nm reverse polarity protected
Panel Construction	aluminum
Photo sensor	shielded extraneous light
Rear lamps	3

Control

Circuit Protection	Automative style blade fuses
Dimming	Manual or automatic
Display	LED, shows operating mode
Meters	Voltage built-in with voltage warning and shut-down
Functions 15 lamp	7
Functions 25 lamp	12

Dimensions

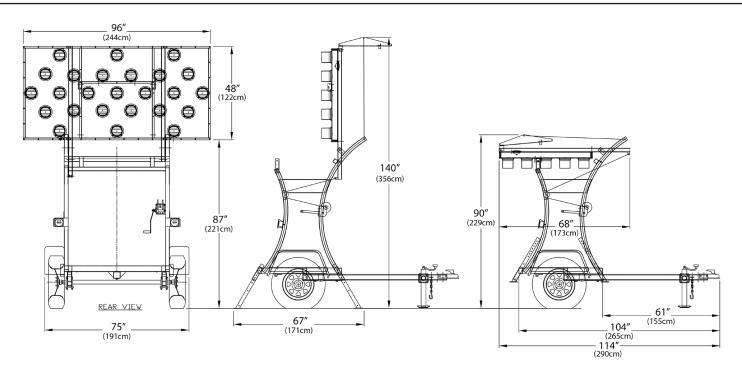

Specifications subject to change any time without notice. Copyright 2023 National Signal, Inc. All rights reserved. Printed in the United States.

- 2440 Artesia Avenue
 Fullerton, CA 92833
 United States of America
- info@nationalsignalinc.n
- 1-888-004-0300



Access our website by scanning our QR Code