

Directional Blank Out Sign DLED

Signage Series




ABOUT THE SIGN

The DLED series is designed for marking the flow of traffic.

This luminaire is also perfect for controlling merging traffic and for directing the flow of traffic entering and exiting toll booths, sports arenas, special event centers, and areas where traffic control is important.

Features

- ✓ Internally illuminated directional luminaire
- ✓ Energy saving LED signage
- ✓ Conforms to MUTCD standards
- ✓ High visibility
- ✓ Low maintenance with easy accessibility

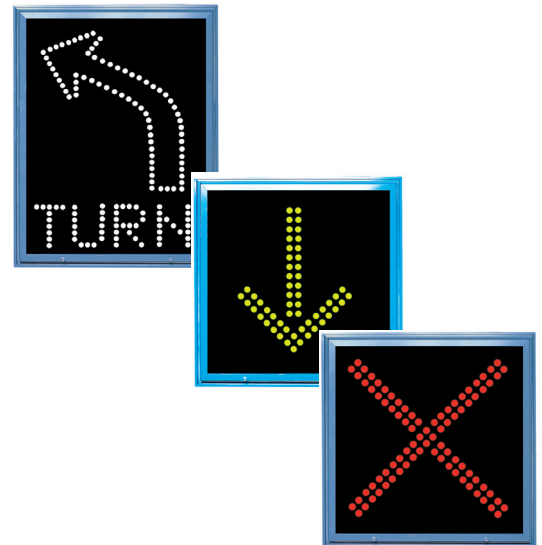

Housing

- The main body and door frame is constructed of .063 5052-H32 aluminum
- Corners are seam welded for water tightness
- The enclosure design conforms to a NEMA 3R type weather proof housing
- Standard finish is a black texture powder coat

Display

- Standard MUTCD regulatory, warning and Lane Control symbols and messages
- Forming the symbols or text are high brightness 5mm LEDs
- Standard symbols and text are double stroke (outline), Triple stroke (filled) is offered on a limited number of signs
- Signs can have multiple message changed by means of internal relays

Electrical

Electrical	Dependent on size and number of LEDs
Voltage	120VAC @ 50/60Hz standard
Max Amps	5
Max Watts	75

Lens

- 0.118 clear acrylic tinted 2074 gray, masking the message when not activated

Product ID Model

DLED

Voltage

120 (Std.)

Size

16 x 16
18 x 18
24 x 24
30 x 30
30 x 36
36 x 36
48 x 48

Finish and Color

MB - Matte black
NA - Natural aluminum
CC - Custom color (please specify)

Mounting

FMM- Freeswing mastarm mounting
DMM- Direct mastarm mounting
SPW- Spanwire mounting

1-1/2" HUB mounting
H1T- single hub top
H1B- single hub bottom
H1 - Hub on top and bottom

Specifications subject to change any time without notice. Copyright 2023 National Signal, Inc. All rights reserved. Printed in the United States.

