

ABOUT OUR MESSAGE SIGN

The Sunray 480 is a character matrix manual lift sign capable of displaying 3 lines of 15" high characters through the color touch screen.

Message scheduling allows you to select the day, week and time that chosen messages should display on your sign. The mid-size sign fits tight spaces but has excellent legibility.

Add FleetFinder and you can visually locate your fleet of signs and change messages from almost anywhere.

Features

AllnGaP LED technology

- Numerous pre-programmed messages, MUTCD messages, and operator-created messages
- Environmentally friendly and cost effective
- Reliable and easy to operate
- Meet or exceed all state and federal highway MUTCD traffic safety specifications
- Replace characters without the need of tools
- 5 LEDs per pixel
- Ergonomically designed control box

Options

REMOTE OPERATION

Standard cellular modem or FleetFinder™



SPEED DETECTION



COMBO HITCH With 8" to 18" adjustment



HIDDEN SHACKLE LOCKS For securing batteries



WHEEL LOCKS



ELECTRO HYDRAULIC LIFT

GPS MODULE

2440 Artesia Avenue
Fullerton, CA 92833
United States of America

info@nationalsignalinc.ne

1-888-994-0300



Access our website by scanning our QR code

Trailer Construction

Width across fenders	78"
Drawbar	2 1/2" x 2 1/2" x .187" wall steel tube / removable
Fenders	formed steel replaceable
Frame	3" x 3" x 1/8" wall tubing
Length w/ drawbar	136″
Length w/o drawbar	106″
Height sign up	149"
Height sign down	104"
Hitch	2" ball class II 3500 lb capacity
Jacks	(4) swing, (1) swing type w/ caster
Tire size	ST205/75-D15 load C
Weight	1600 lbs
Lift mechanism	2,500 lb with double disc brake. 1/4" diameter steel rope cable rated 4,400 lb. Electro-hydraulic optional

Display

Pixel matrix SR480	5 x 7 character, 5 LEDs per pixel
Character size	15", 8 per line, 3 lines
LEDs	590 nm amber, 5 per pixel
Brightness	Manual/automatic 31 levels
Photo Sensor	Shielded from extraneous light
Enclosure	Aluminum, finished powder coated black
Sign dimensions	59" high by 96" wide
Characters	Remove without need for tools
Window	1/8" clear polycarbonate anti-glare is optional


Control

Batteries and Solar Collectors

Batteries	6v or 12v deep cycle with varying options
Battery charger	15A to 30A fanned cooled, external plug, (45A optional)
Battery enclosure	Lockable, ventilated, acid resistant
Solar collector	Crystalline silicon, 120w

Туре	Proprietary embedded, fully NTCIP compliant
Dimming	Manual or automatic
LCD	4 lines, 40 characters per line, backlit
Remote Comm	Cellular capable
Messages	50 user programmable (4 pages each), 300 pre-programmed
Message scheduling	36 events

Dimensions

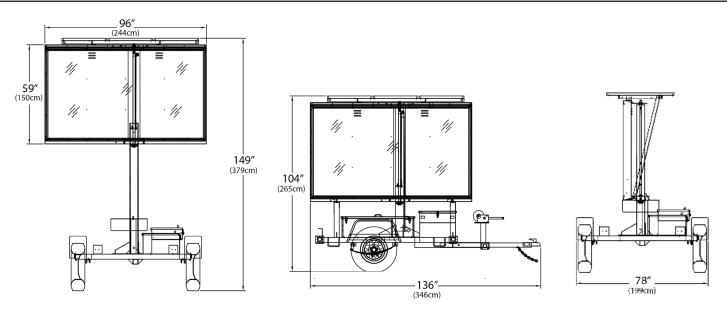

Specifications subject to change any time without notice. Copyright 2023 National Signal, Inc. All rights reserved. Printed in the United States.

2440 Artesia Avenue
Fullerton, CA 92833
United States of America

info@nationalsignalinc.n

www.nationalsignalinc.ne

1-888-004-0300



Access our website by scanning our QR code